

Dual color 2216 LED strip 224LEDs/M DC24V



1800K dim to 3000K only need the traditional dimmer

1800K (Dimmed) 3000K (Full Brightness)



◆ Product Description:

- High density CCT color Adjustable LED strip has 224pcs 2216 LEDs
- With 10mm Width
- Cut-able every 14LEDs & 62.5mm
- All soldering Pads are very large, allowing you to easily cut and reconnect
- DC24V constant voltage operation
- Both ends have 3pin bare wires for powering
- 3M tape attached on backside of FPC

◆ Product Datasheet


Product Number	S008224XC2PZ
Operating Voltage	DC24V
Power/m	8W
SMD Type	2216
LED Qty/m	112+112
Cutting Length	62.5mm/14LED
Color	1800K-3000K
Luminance/m	W: 818 WW:180lm
Material	FPC
Control	PWM
Beam Angle	120°
Size (mm)	5000x8mm
IP Rating	IP20/IP65
Operation Temperature	- 25 ~ 60°C

Remarks:


- 1.The above parameters were tested according to integrating sphere TM-30-15.
- 2.The output data is based on IP20 and one merter.
- 3.The data such as power etc, $\pm 15\%$ tolerance is normal.
- 4.IP protection process causes changes in size, CCT and luminous flux.

A1.25-03-04

Outline Dimension (unit: mm/in)

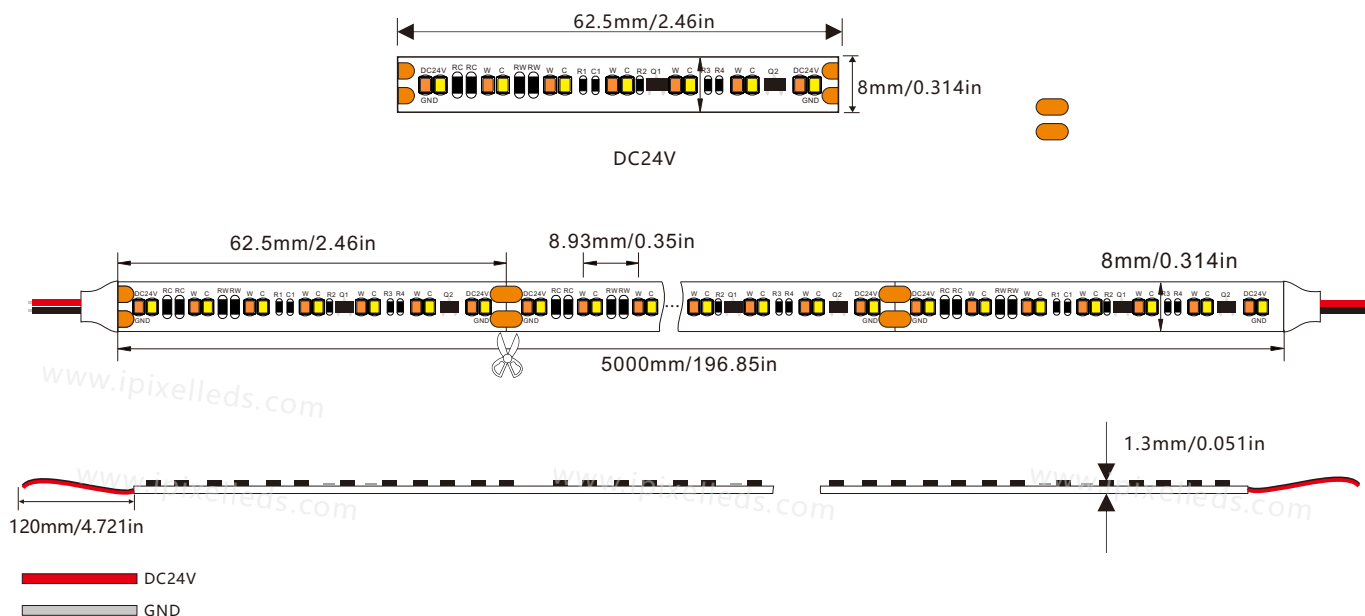

Wiring diagram

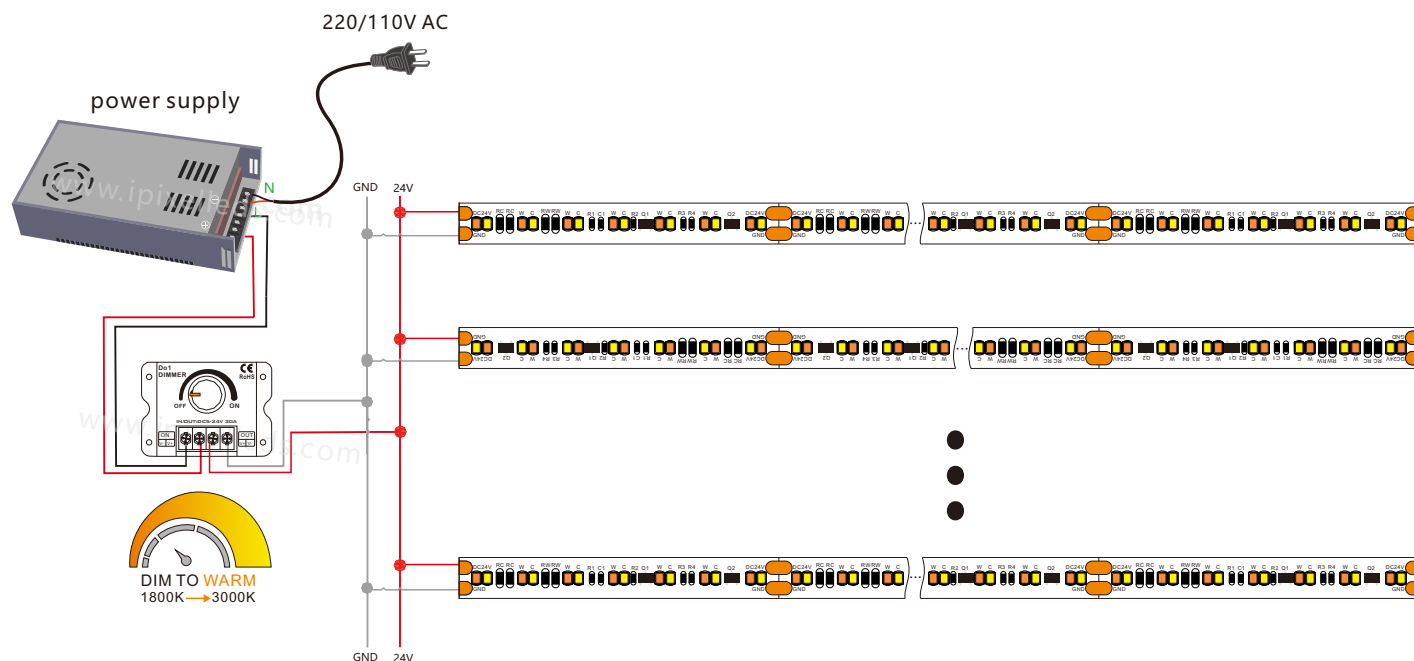


IP Rating




A1.25-03-04


◆ Percentage Of Dimming (%) & CCT:

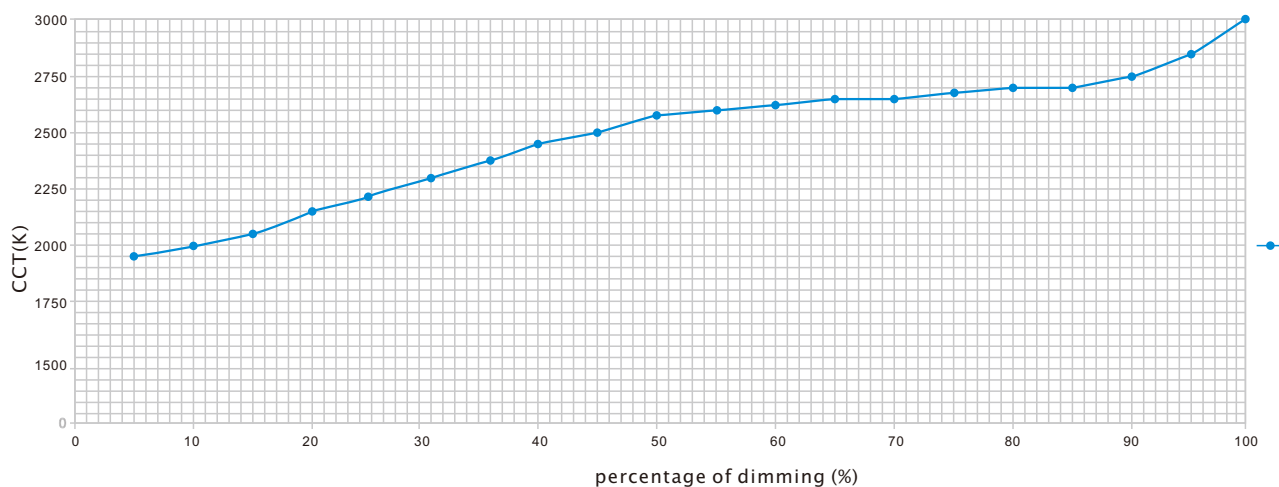

◆ Percentage Of Dimming (%) & Luminance Value:

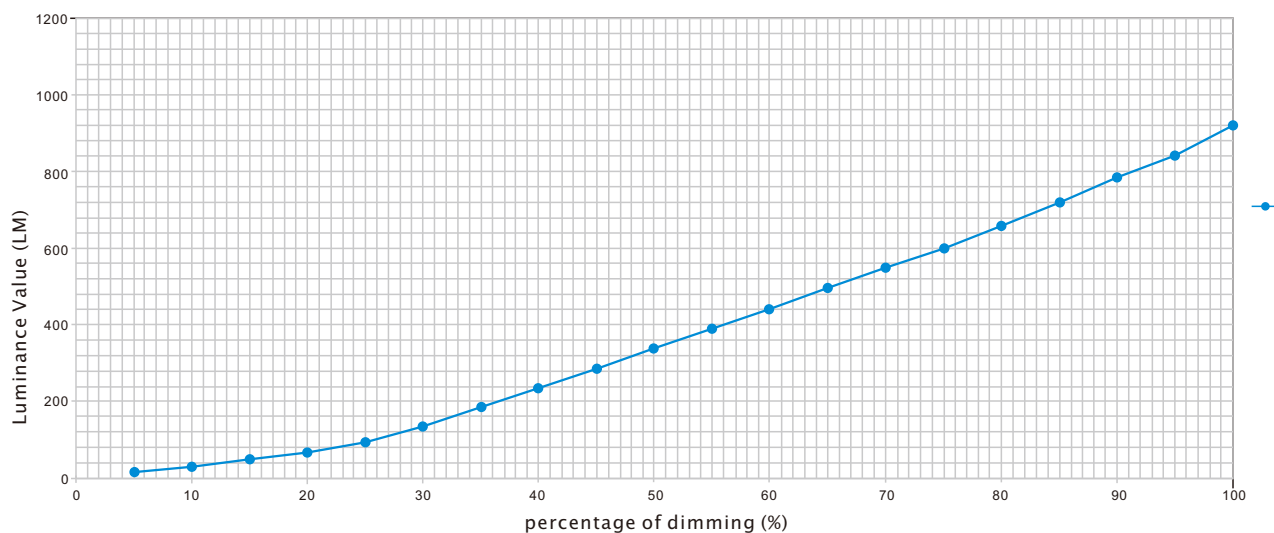

◆ Percentage Of Dimming (%) & Power:

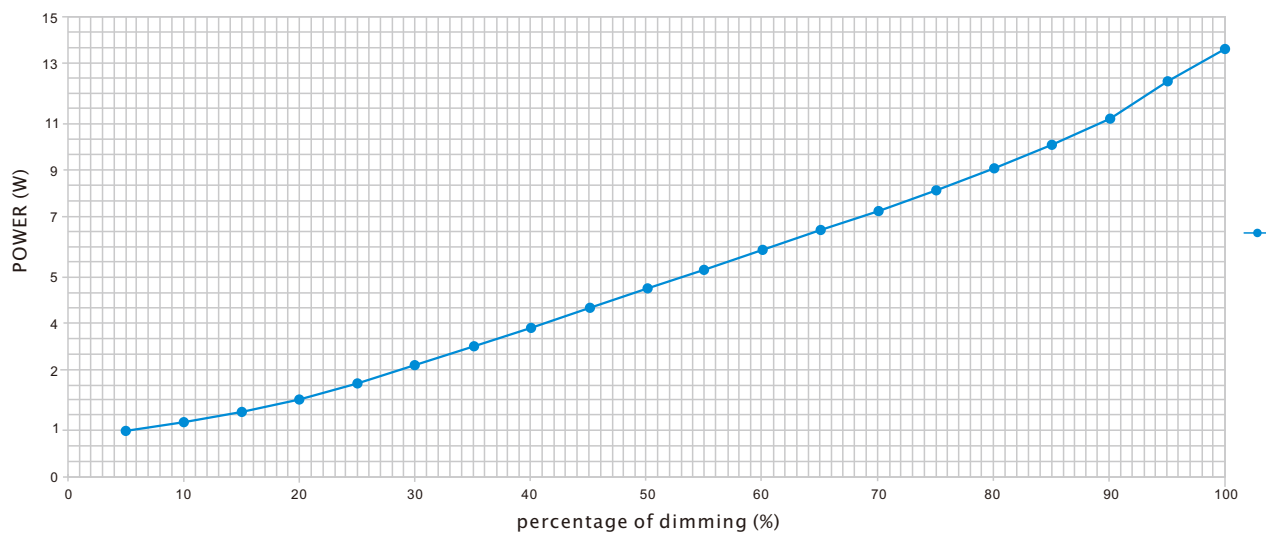


Note: The parameters are subject to change without notice!

A1.25-03-04

◆ Related products:



Power supply
LRS-350-24




Alum profile
1613




RF dimmer
D01


◆ Installation method:




Can be cut




Tear off the 3M adhesive as need




Folding pads



Excessive bending



Bend to LED




Reverse Strip

Distortion(Wrong)

◆ Product packaging



Reel



Antistatic bag

