


5050 single Color LED Strip 30LEDs/M DC5V



◆ Product Description:

- Use 5050 high brightness led, high purity gold line, SANAN chip.
- 30LEDs/M, high luminance efficiency.
- Input voltage DC5V.
- Flexible PCB, FPC color: white.
- Standard length 5m per roll. The length also can be customized.

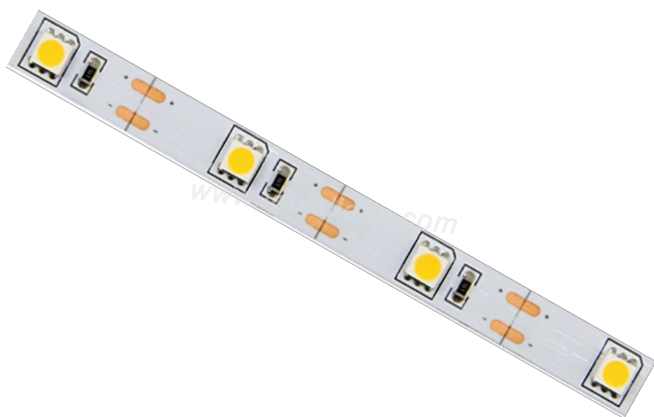


◆ Product Datasheet

Product Number	S008030CA1LZ
Operating Voltage	DC5V
Power/m	7.2W
SMD Type	SMD 5050
LED Qty/m	30
Cutting Length	33.33mm / 1 LED
Color	W:3000K/4000K/6500K
Luminance/m	W:500lm
SDCM	<5
Ra	80
Beam Angle	120°
Size (mm)	5000x8mm
IP Rating	IP20/IP64/IP65/IP67
Operation Temperature	- 25 ~ 60°C


Remarks:

- 1.The above parameters were tested according to integrating sphere TM-30-15.
- 2.The output data is based on IP20 and one merter.
- 3.The data such as power etc, $\pm 15\%$ tolerance is normal.
- 4.IP protection process causes changes in size, CCT and luminous flux.


Outline Dimension (unit:mm/in)

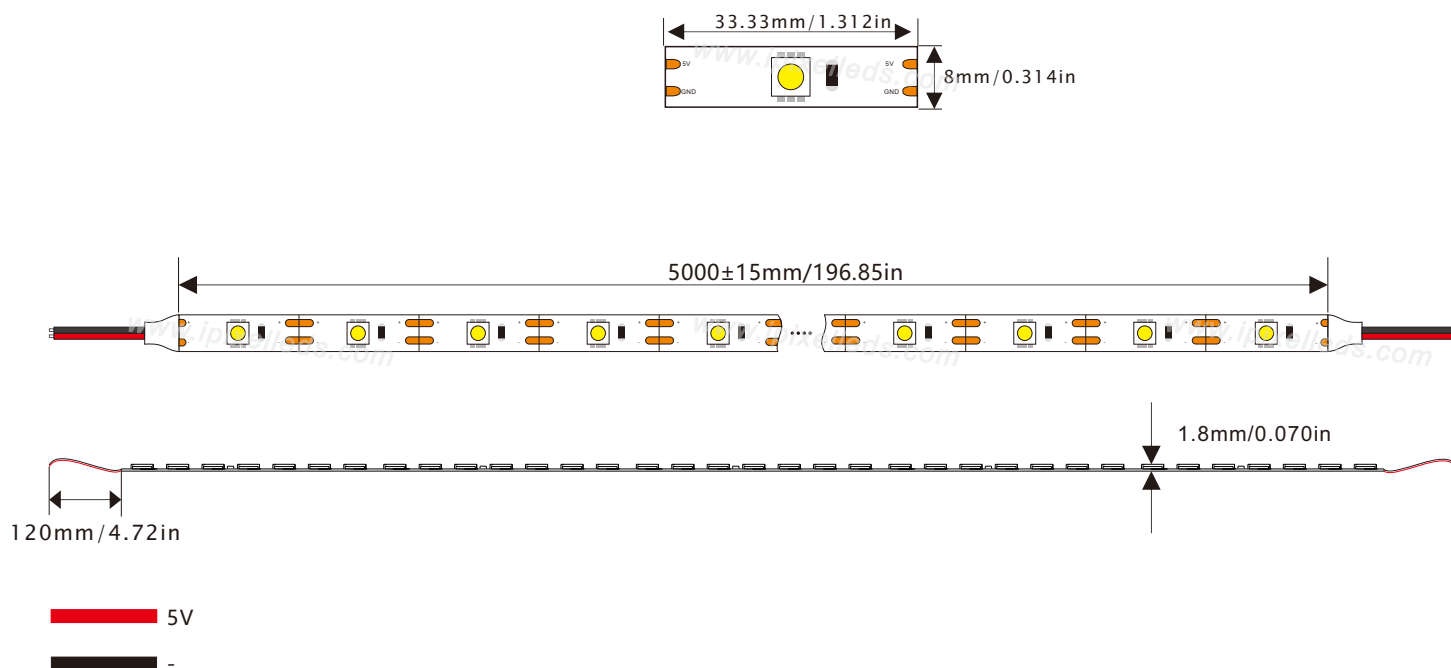

Wiring diagram

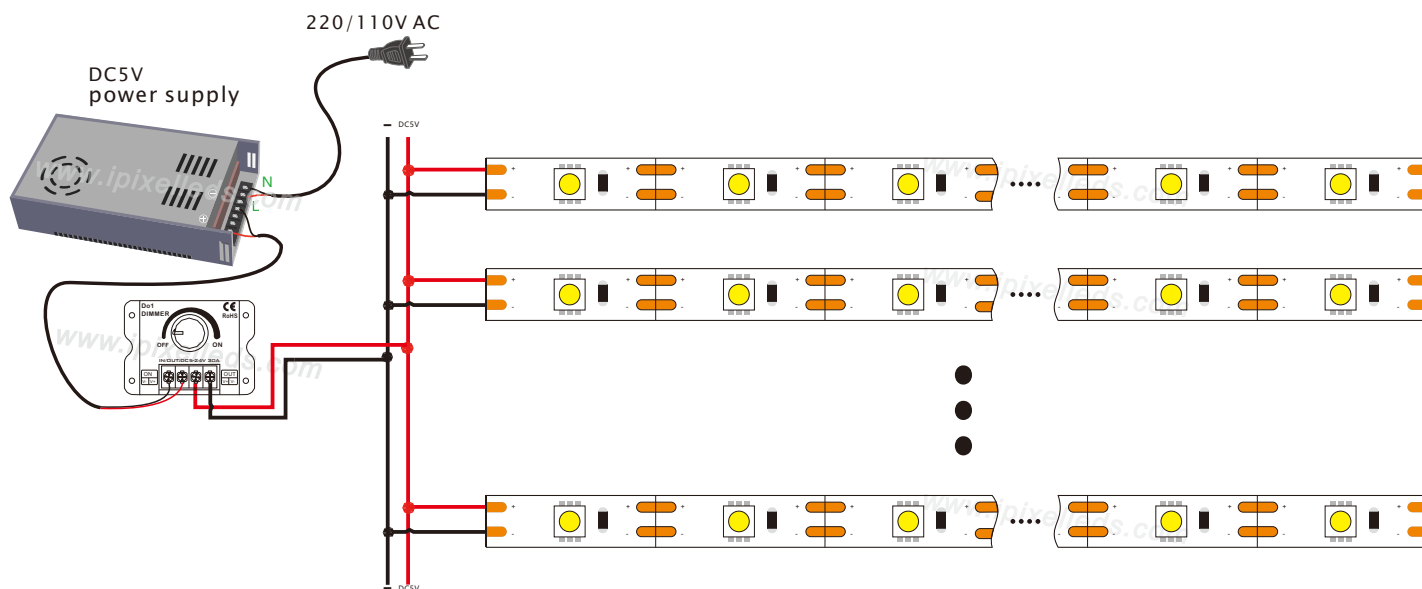

IP Rating

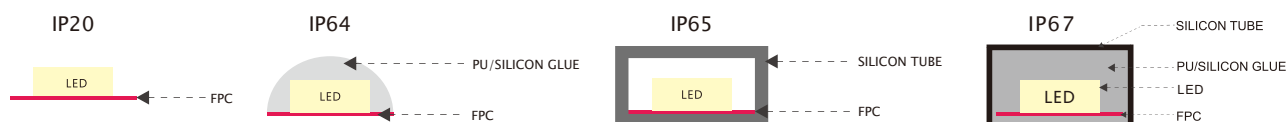

◆ Related products:




Power supply
LRS-350-5




RF dimmer
D01


◆ Installation method:




Can be cut




Don't peel all 3M tape at once.




Folding pads

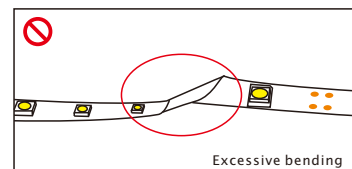

Excessive bending



Bend to LED

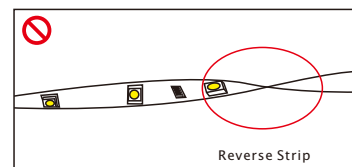


Reverse Strip

Distortion(Wrong)


◆ Product packaging



Reel



Antistatic bag



Note: The parameters are subject to change without notice!

A1.24-06-11